



**Showerwell**  
HOME PRODUCTS



BRANZ Appraised  
Appraisal No. 1053 [2019]

**Tile Safe  
Shower System**



# Tile Safe Shower System

## CONTENTS



ABOUT SHOWERWELL	2
THE SHOWERWELL TILE SAFE SHOWER SYSTEM	4
SHOWERWELL STERLING 10MM DOOR	6
SHOWERWELL 10MM SLIDING DOOR	9
SHOWERWELL STERLING 6MM DOOR	12
SHOWERWELL BETA DESIGNER DOOR	15
SHOWERWELL COMPONENTS & STANDARD TRAY SIZES	18
SHOWERWELL NICHE	20
TILE SAFE INSTALLATION	21



**NEW ZEALAND  
OWNED & OPERATED  
SINCE 1989**

Showerwell Home Products is New Zealand's largest supplier of standard and custom-made showers. Over the past 30 years we have built a solid reputation as a provider of quality bathroom and wardrobe solutions. At the core of our philosophy is quality, simplicity, and style.

As a result of our commitment to providing quality products, competitive pricing, and professional installation services, Showerwell is the preferred supplier of many group housing companies. What's more, you'll find the Showerwell brand in a multitude of high-rise apartment buildings, retirement villages, and hotels throughout the country. Whether you're an architect, a one-off customer, builder, or developer, you can trust the Showerwell brand to help you realise the vision for your next bathroom project.



## Standing the test of time

Well respected by interior designers, architects, builders, plumbers, and developers, Showerwell provide a comprehensive range of products to suit a variety of bathroom needs. Our combination of exceptional customer service, technical knowledge, and quality products that stand the test of time, provide you with guaranteed 'Showerwell peace of mind.'

Visit one of our showrooms today to find out more.





**NEW ZEALAND'S  
TRIED, TESTED, AND  
TRUSTED TILE SAFE  
SHOWER SYSTEM**

## The Showerwell Tile Safe Shower System

At Showerwell, we are dedicated to the ongoing process of product design and development to provide a high-quality tiled shower system. To achieve this, we constantly re-evaluate our products and implement design refinements utilising the most up-to-date technology and materials available.

The Showerwell Tile Safe Shower System - now in its 5th generation - demonstrates the technical and design ingenuity that has made Showerwell a market leader. The range embraces a contemporary style, and allows you to create a look and feel to suit your taste and budget.



## Trusted quality and Performance

Showerwell's shower systems have been specified by some of New Zealand's largest group housing companies, consistently for the past 25 years. Testimony to the fact that our shower systems are designed to work, year after year.

This carefully selected range of showers is the perfect solution if you prefer a modern style. The designs are reduced to only the necessary elements to achieve a clean, simple, and contemporary appearance.

## Showerwell peace of mind

With almost 30 years in the bathroom industry, Showerwell's tileable shower system has been continually upgraded to overcome all endemic issues found with other systems. What's more, Showerwell offer a 5 year warranty - with our experience and track record, you can relax knowing that the company will still be around to honour that warranty, or to offer advice, should help be required in the future. So you can enjoy the peace of mind that comes with knowing that you have purchased a 'complete tile over shower system' that's guaranteed to last.



Showerwell  
Sterling 10mm  
Tile Safe Shower





# Showerwell Sterling 10mm Specifications



## Proprietary Shower Tray

- Patented solid closed cell tray
- Fibrous cement board for rigidity, sitting directly on the floor
- Reinforced polymer tray surface
- Integrally bonded waste system
- High-strength, bright alloy tray perimeter profile
- Tray profile reinforced matting
- Aqua-defense waterproof coating over entire tray surface
- Central drain position on all trays, with back corner waste on selected sizes
- Predetermined tray fall, saving time and making tiling easier

## Standard Tray Installation

- On floor installations. Nominal 68mm tray height (including aluminium perimeter profile) with 4mm - 10mm step-down depending on the tile thickness used

## Wall Liner

- Specialised high-impact plasticised wall liners
- Two or three wall shower options

## Easy-clean Waste Trap

- Waste outlet centre position or back corner position on selected sizes
- 90° easy-clean waste - solvent joint
- Straight through waste outlet - solvent joint

## Sterling 10mm Glass Shower Enclosure

- 10mm glass thickness
- Standard height 1950mm (Nominal 2000mm with tray)
- Manufactured to NZ/AS Safety Standard NZAS2204:1996
- High-quality polished and bright anodised wall channels
- Available as magnetic seal or double swing action door
- Hinges: high-quality chrome plate on brass
- Handle options: Curved Designer, Post and Rail, Square D Style
- Standard sizes to match Tile Safe standard tray sizes
- Custom-made sizing to suit custom Tile Safe Tray dimensions

## Installation service

To ensure all aspects of your tiled shower are installed according to the installation instructions provided, we strongly recommend utilising our factory trained installers. Showerwell's factory warranty will then cover the installation as well as the Tile Safe Shower System.

## The Installation Process


- Shower tray, standard or custom-made, together with the waste system available for your chosen plumber to install
- The tray and easy-clean waste installed as per the installation instructions
- GIB plaster board or other wall lining installed flush with the tray perimeter profile by your builder
- Showerwell install the special plasticised wall liners and door/return wall channels
- Tiler completes the necessary tiling of walls and tray, and tile grouting
- Showerwell returns to site to install the shower door and/or returns, ensuring they are adequately sealed

# Showerwell Sterling 10mm Standard Sizes




## Three wall shower


900mm x 900mm  
1000mm x 1000mm  
1200mm x 900mm

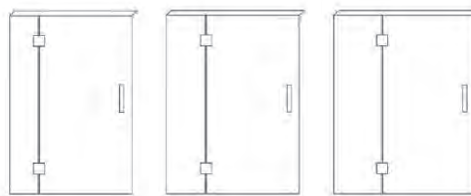

1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm

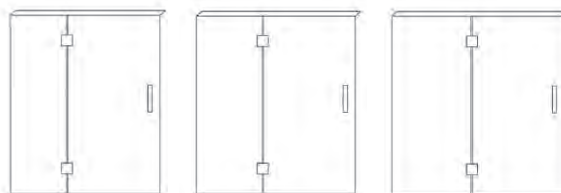


1800mm x 1000mm  
2000mm x 1000mm

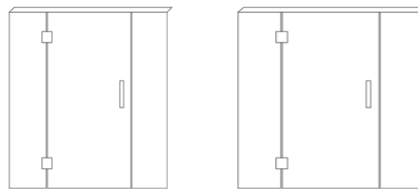


## Two wall shower


900mm x 900mm  
1000mm x 1000mm  
1200mm x 900mm

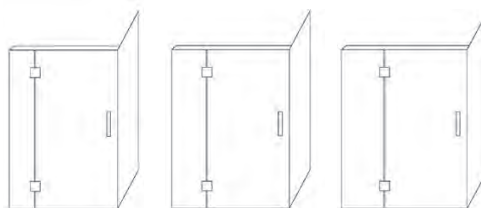

1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm

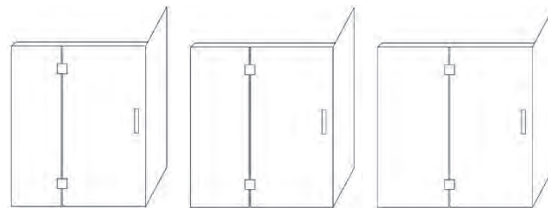

1800mm x 1000mm  
2000mm x 1000mm

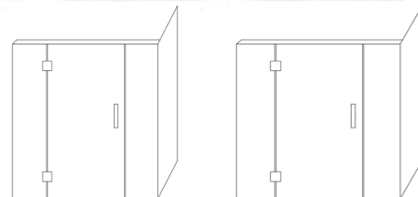

## HANDLE OPTIONS

Designer Post & Rail single or Designer Curved single are standard options. Other handles shown are optional extras.

### Designer Post & Rail



single



double

### Designer Curved



single

### 10mm Stainless Steel Square




double

The Showerwell Sterling 10mm Tile Safe shower is also available as custom-made to suit your specific needs

# Showerwell 10mm Slider Specifications



# Showerwell 10mm Slider Specifications

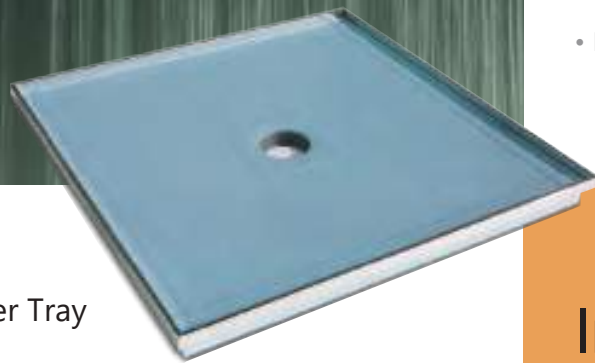

## Proprietary Shower Tray

- Patented solid closed cell tray
- Fibrous cement board for rigidity, sitting directly on the floor
- Reinforced polymer tray surface
- Integrally bonded waste system
- High-strength, bright alloy tray perimeter profile
- Tray profile reinforced matting
- Aqua-defense waterproof coating over entire tray surface
- Central drain position on all trays, with back corner waste on selected sizes
- Predetermined tray fall, saving time and making tiling easier

## Standard Tray Installation

- On floor installations. Nominal 68mm tray height (including aluminium perimeter profile) with 4mm - 10mm step-down depending on the tile thickness used

## Wall Liner

- Specialised high-impact plasticised wall liners
- Two or three wall shower options

## Easy-clean Waste Trap

- Waste outlet centre position or back corner position on selected sizes
- 90° easy-clean waste - solvent joint
- Straight through waste outlet - solvent joint

## 10mm Slider Glass Shower Enclosure

- 10mm glass thickness
- Standard height 1950mm (Nominal 2000mm with tray)
- Manufactured to NZ/AS Safety Standard NZAS2204:1996
- High-quality polished and bright anodised wall channels
- Polished stainless steel rollers and rail
- Handle: Square D style as standard.  
Options: Curved Designer, Post and Rail
- Standard sizes to match Tile Safe standard tray sizes: 1200mm, 1400mm, 1600mm, and 1800mm
- Doors can adjust to allow for custom-made tray sizing

## Installation service

To ensure all aspects of your tiled shower are installed according to the installation instructions provided, we strongly recommend utilising our factory trained installers. Showerwell's factory warranty will then cover the installation as well as the Tile Safe Shower System.

### The Installation Process


- Shower tray, standard or custom-made, together with the waste system available for your chosen plumber to install
- The tray and easy-clean waste installed as per the installation instructions
- GIB plaster board or other wall lining installed flush with the tray perimeter profile by your builder
- Showerwell install the special plasticised wall liners and door/return wall channels
- Tiler completes the necessary tiling of walls and tray, and tile grouting
- Showerwell returns to site to install the shower door and/or returns, ensuring they are adequately sealed



# Showerwell 10mm Slider Standard Sizes

## Three wall shower

1200mm x 900mm  
1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm

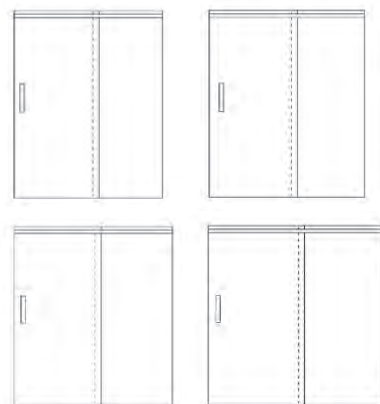

## HANDLE OPTIONS

The 10mm stainless steel square single handle is the standard option. Other handles shown are optional extras.

### Designer Post & Rail



single

double

### Designer Curved



single


### 10mm Stainless Steel Square



double

## Two wall shower

1200mm x 900mm  
1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm

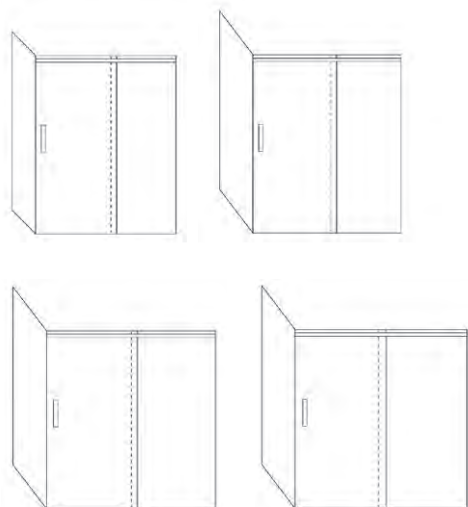


The Showerwell 10mm Slider adjusts to suit various custom tray widths

Showerwell  
Sterling 6mm  
Tile Safe Shower



# Showerwell Sterling 6mm Specifications

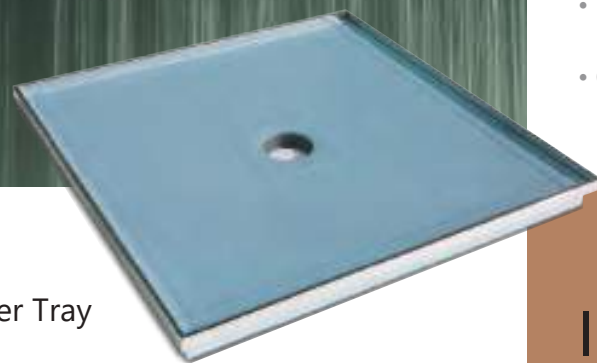

## Proprietary Shower Tray

- Patented solid closed cell tray
- Fibreous cement board for rigidity, sitting directly on the floor
- Reinforced polymer tray surface
- Integrally bonded waste system
- High-strength, bright alloy tray perimeter profile
- Tray profile reinforced matting
- Aqua-defense waterproof coating over entire tray surface
- Central drain position on all trays, with back corner waste on selected sizes
- Predetermined tray fall, saving time and making tiling easier

## Standard Tray Installation

- On floor installations. Nominal 68mm tray height (including aluminium perimeter profile) with 4mm - 10mm step-down depending on the tile thickness used

## Wall Liner

- Specialised high-impact plasticised wall liners
- Two or three wall shower options

## Easy-clean Waste Trap

- Waste outlet centre position or back corner position on selected sizes
- 90° easy-clean waste - solvent joint
- Straight through waste outlet - solvent joint

## Sterling 6mm Glass Shower Enclosure

- 6mm glass thickness
- Standard height 1950mm (Nominal 2000mm with tray)
- Custom-made up to 2000mm high
- Manufactured to NZ/AS Safety Standard NZAS2204:1996
- High-quality polished and bright anodised wall channels
- Available as magnetic seal or double swing action door
- Glass brace with associated glass clamps
- Handle options: Curved Designer, Post and Rail, Square D Style
- Custom-made to match all standard trays or custom manufactured trays

## Installation service

To ensure all aspects of your tiled shower are installed according to the installation instructions provided, we strongly recommend utilising our factory trained installers. Showerwell's factory warranty will then cover the installation as well as the Tile Safe Shower System.

## The Installation Process

- Shower tray, standard or custom-made, together with the waste system available for your chosen plumber to install
- The tray and easy-clean waste installed as per the installation instructions
- GIB plaster board or other wall lining installed flush with the tray perimeter profile by your builder
- Showerwell install the special plasticised wall liners and door/return wall channels
- Tiler completes the necessary tiling of walls and tray, and tile grouting
- Showerwell returns to site to install the shower door and/or returns, ensuring they are adequately sealed

# Showerwell Sterling 6mm Standard Sizes




## HANDLE OPTIONS


Designer Post & Rail single or Designer Curved single are standard options. Other handles shown are optional extras.

### Three wall shower

900mm x 900mm  
1000mm x 1000mm  
1200mm x 900mm

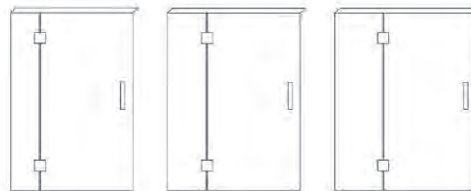

1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm

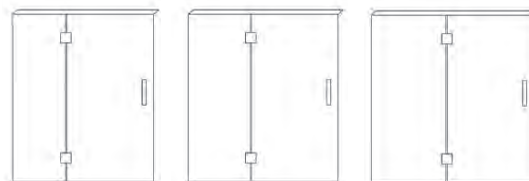

#### Designer Post & Rail




single




double

### Two wall shower

900mm x 900mm  
1000mm x 1000mm  
1200mm x 900mm

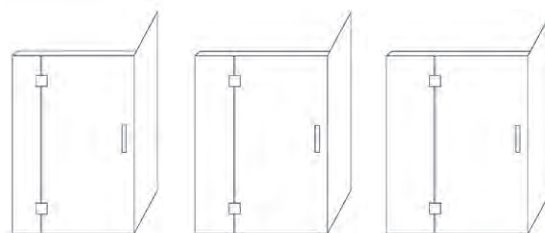

1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm

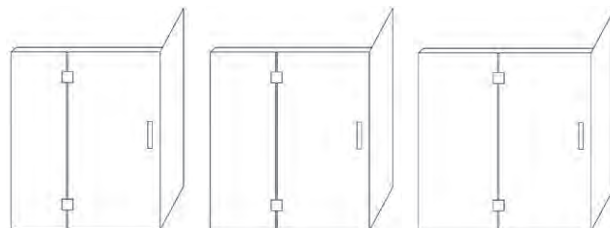

#### Designer Curved



single

#### 10mm Stainless Steel Square



double


The Showerwell Sterling 6mm shower door/return are custom-made to suit standard or custom sized Tile Safe trays



Showerwell  
Beta Designer  
Tile Safe Shower



# Showerwell Beta Designer Specifications

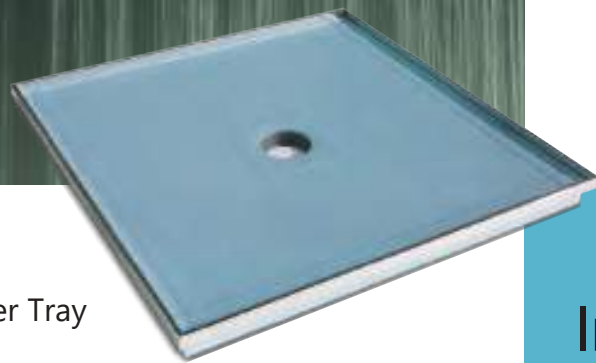

## Beta Designer Framed Shower Enclosure

- 6mm glass thickness
- Framed return glass thickness
- Standard height 1950mm (Nominal 2000mm with tray)
- Manufactured to NZ/AS Safety Standard NZAS2204:1996
- High-quality polished and bright anodised frames and channels, satin anodised or white powder coat frames and channels
- Handle options: Curved Designer, Post and Rail
- Standard sizes to match all trays, or custom made to match custom made trays/

## Proprietary Shower Tray

- Patented solid closed cell tray
- Fibrous cement board for rigidity, sitting directly on the floor
- Reinforced polymer tray surface
- Integrally bonded waste system
- High-strength, bright alloy tray perimeter profile
- Tray profile reinforced matting
- Aqua-defense waterproof coating over entire tray surface
- Central drain position on all trays, with back corner waste on selected sizes
- Predetermined tray fall, saving time and making tiling easier

## Standard Tray Installation

- On floor installations. Nominal 68mm tray height (including aluminium perimeter profile) with 4mm - 10mm step-down depending on the tile thickness used

## Wall Liner

- Specialised high-impact plasticised wall liners
- Two or three wall shower options

## Easy-clean Waste Trap

- Waste outlet centre position or back corner position on selected sizes
- 90° easy-clean waste - solvent joint
- Straight through waste outlet - solvent joint

## Installation service

To ensure all aspects of your tiled shower are installed according to the installation instructions provided, we strongly recommend utilising our factory trained installers. Showerwell's factory warranty will then cover the installation as well as the Tile Safe Shower System.

## The Installation Process

- Shower tray, standard or custom-made, together with the waste system available for your chosen plumber to install
- The tray and easy-clean waste installed as per the installation instructions
- GIB plaster board or other wall lining installed flush with the tray perimeter profile by your builder
- Showerwell install the special plasticised wall liners and door/return wall channels
- Tiler completes the necessary tiling of walls and tray, and tile grouting
- Showerwell returns to site to install the shower door and/or returns, ensuring they are adequately sealed

# Showerwell Beta Designer Standard Sizes



## Three wall shower

900mm x 900mm  
1000mm x 1000mm  
1200mm x 900mm



1800mm x 1000mm  
900mm x 900mm  
1000mm x 1000mm



## Two wall shower

900mm x 900mm  
1000mm x 1000mm  
1200mm x 900mm




1400mm x 1000mm  
1600mm x 1000mm  
1800mm x 1000mm



## 45 degree showers

900mm x 900mm  
1000mm x 1000mm

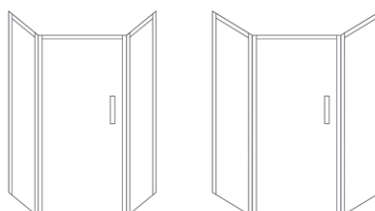

## HANDLE OPTIONS

Designer Post & Rail single or Designer Curved single are standard options. Other handles shown are optional extras.

### Designer Post & Rail



single

double

### Designer Curved



single

### 10mm Stainless Steel Square



double


The Showerwell Beta Designer Tile Safe shower is also available as custom made to suit your specific needs

# Showerwell Tile Safe Shower Base Components



## Shower tray

Showerwell's Tile Safe System utilises the latest patented technologies to produce high-quality, high performance shower trays, as well as a waste system that is integral to the tray. The waste flange is bonded to the tray, eliminating any potential leaks in this area. The shower tray base is designed with high-impact, specialised wall liners.

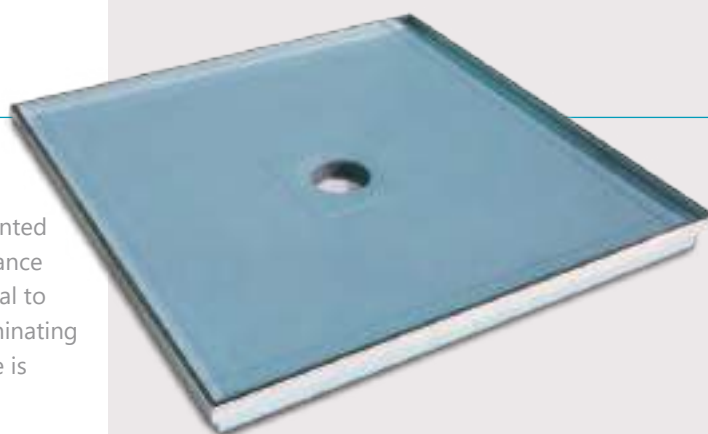

## Waste body


The Showerwell waste body is easy to install, and easy to clean

- Complete with internal trap
- Easy-clean waste straight through - fully revolving outlet
- Easy-clean waste 90° offset - fully revolving outlet




## Tile insert/stainless steel shower grate


- Height adjustable threaded body to compensate for various tile thicknesses
- Reversible plate for stainless steel or tile insert for a seamless finish

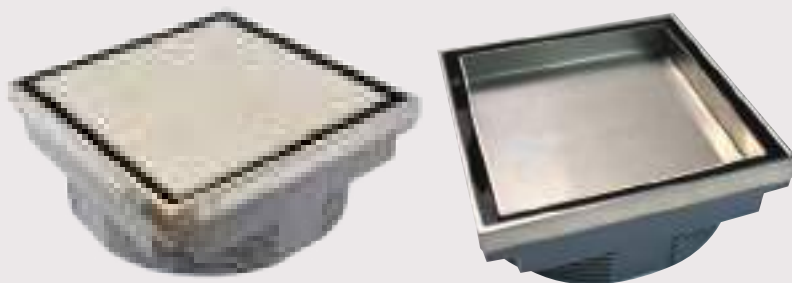



# Showerwell Shower Tray Standard Sizes




900mm x 900mm

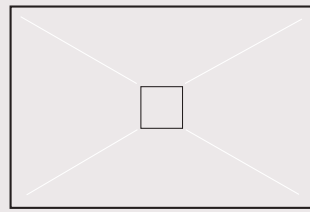


1200mm x 900mm – also available with waste position top left or bottom right (220mm from edge)

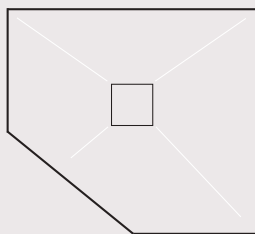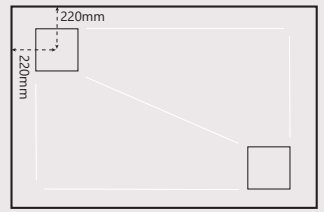


900mm x 900mm x 45 degrees  
1000mm x 1000mm x 45 degrees

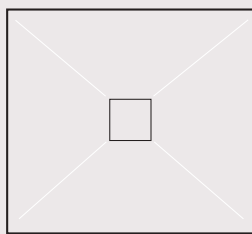


1000mm x 1000mm

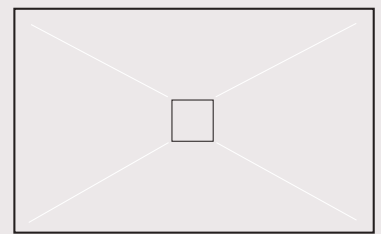


1400mm x 1000mm

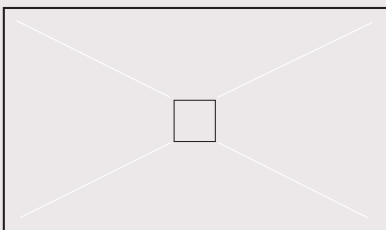

1600mm x 1000mm

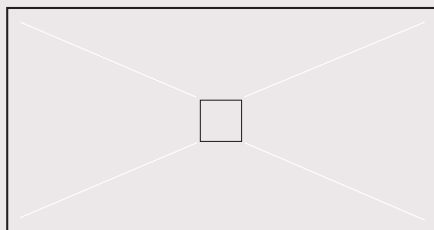

1800mm x 1000mm

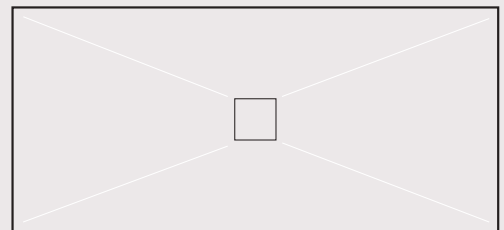

2000mm x 1000mm

The Showerwell Tile Safe shower trays are also available as custom-made within the size constraints of the standard trays

# Showerwell Shower Niche



## Shower niche specifications


- One-piece, recessed unit to hold accessories
- Watertight - polymer sealed and Aqua-defence waterproof coating
- Fits 70mm - 90mm wall cavity or framing
- 10mm thick
- Size overall: 360mm x 360mm x 80mm
- Size internally: 300mm x 300mm x 70mm (without tiles)
- Suitable for Gib board or fibre-cement board (10mm in thickness)
- Compatible with waterproof membranes
- Showerwell 5-year warranty

## SHOWER NICHE INSTALLATION




### STEP 1

Ensure framing and nogs suit the niche size. Using 25mm stainless steel screws affix the niche by screwing through the Niche flanges into the stud and nogs, three screws on all four sides of the Niche.

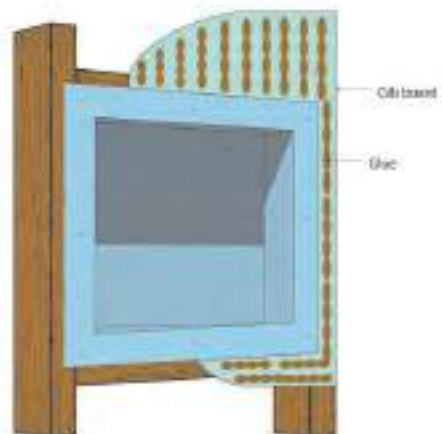

### STEP 2



Install Gib board flush to the outside edge of the Niche flange.

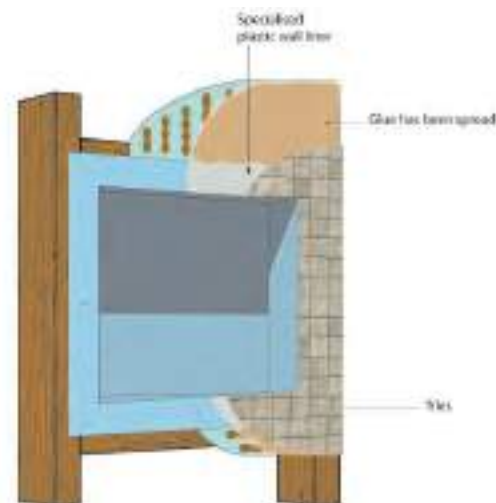

### STEP 3

Using suitable construction adhesive apply vertical lines of adhesive to the Gib board. Add an 8mm bead of NG silicone around the flange perimeter, inside of the screws position of the Niche. Install the cut-to-size specialised plasticised liner, ensuring a solid bond between the liner and Gib board, rolling or spreading of the adhesive is necessary to achieve a good bond. Ensure the NG silicone has firmly sealed the liner to the flanges of the Niche to stop any water migrating behind the liner. After the curing time of the adhesive and silicone, installation of the tiling can be completed.

# Showerwell Tile Safe Shower Installation

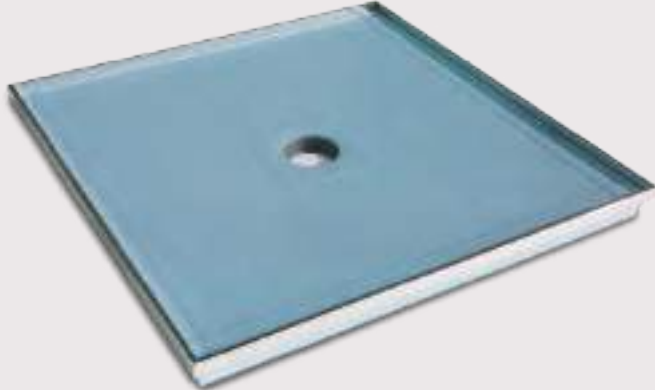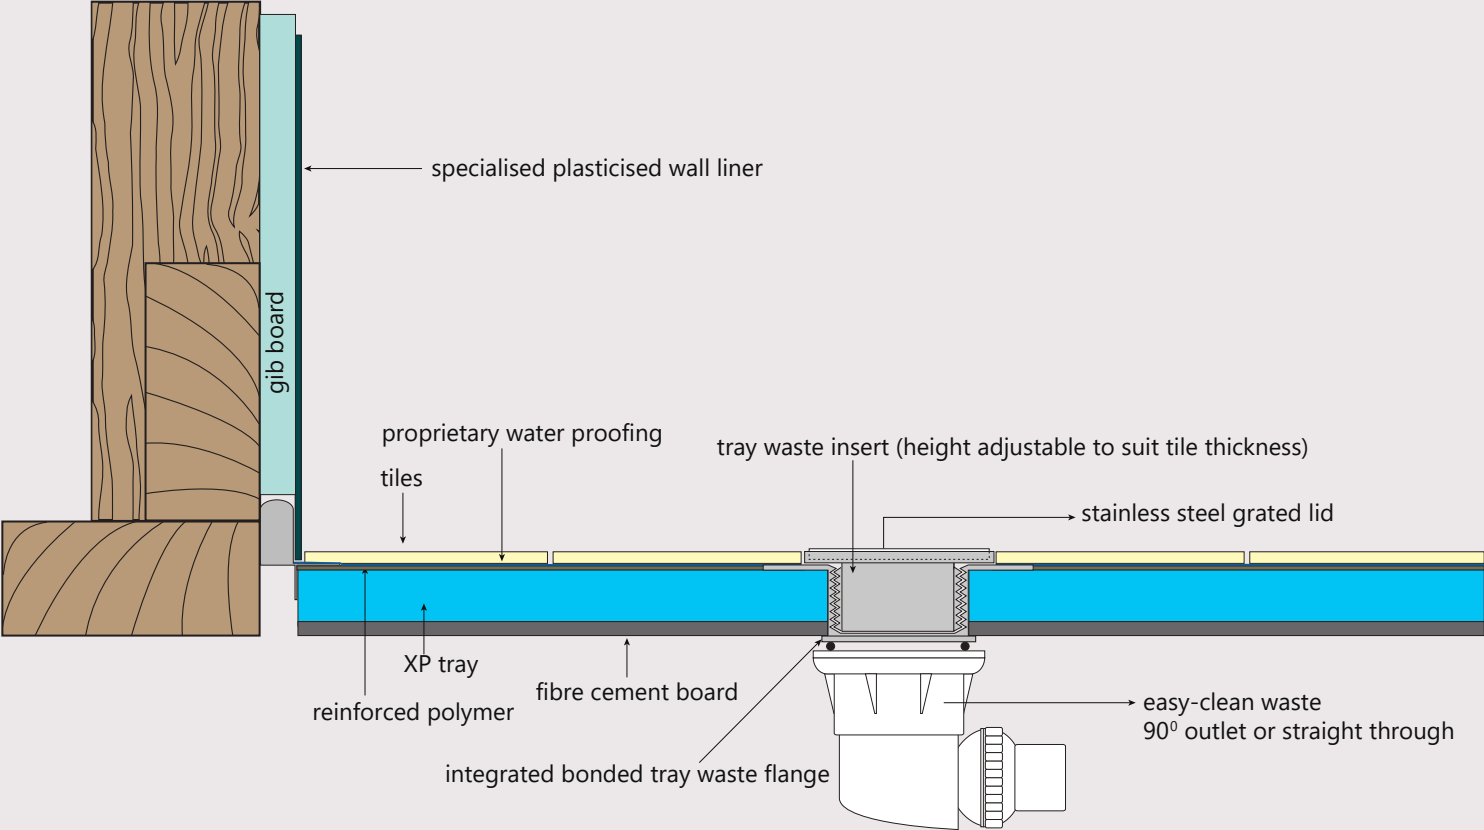

# Did you know?

Showerwell supply a broad range of home products including:

Showers, baths, mirrors, tapware, wardrobe doors and organisers, laundry tubs, and kitchen splashbacks.

All our products are designed and manufactured with quality, performance, and function in mind.



## Call us today to discuss your home or bathroom needs

- Auckland** 15 Gordon Road, St Lukes  
Ph: 09 845 8212 / [stlukes@showerwell.co.nz](mailto:stlukes@showerwell.co.nz)
- East Tamaki** 21 Neil Park Drive, East Tamaki  
Ph: 09 273 0151 / [easttamaki@showerwell.co.nz](mailto:easttamaki@showerwell.co.nz)
- Takapuna** 117 Wairau Road, Wairau Valley  
Ph: 09 443 5633 / [takapuna@showerwell.co.nz](mailto:takapuna@showerwell.co.nz)
- Tauranga (Tilemax)** 5a MacDonald Street, Mount Maunganui  
Ph: 07 575 7755 / [tauranga@tilemax.co.nz](mailto:tauranga@tilemax.co.nz)
- Christchurch** 182 Barbadoes Street, Christchurch  
Ph: 027 201 9250 / [info@shower.co.nz](mailto:info@shower.co.nz)
- Waikato** 31 Higgins Road, Hamilton  
Ph: 07 222 2783 / [waikato@showerwell.co.nz](mailto:waikato@showerwell.co.nz)
- Wellington** 37 Old Hutt Road, Mezz Level (Tilemax Building)  
Ph: 04 499 4415 / [wellington@tilemax.co.nz](mailto:wellington@tilemax.co.nz)

[www.showerwell.co.nz](http://www.showerwell.co.nz)

  
**Showerwell**  
HOME PRODUCTS