




Infinity

BATHROOM LINE




SHOWER TRAYS



INSULATION BOARD



NICHES

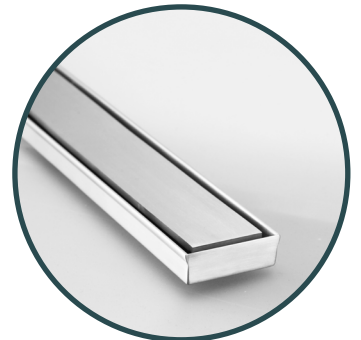


SHOWER DRAINS

Infinity Shower Trays are made of XPS foam board coated with fibreglass for added strength and performance. Furthermore an extra safeguard of a German designed Pre-Waterproof cement coating on both sides.


The Infinity Shower Trays easily forms a "walk-in" shower tray which, designed for NZ homes, falls towards the drainage area saving labour costs. The high quality Infinity Shower Trays are available with several configurations which can be used, such as centre waste, linear waste, or wedge sloped shape which will fall into a full length linear waste.

- ✓ Linear waste drainage support is reinforced with stainless steel to ensure final waterproofing is easy to complete and fully compliant
- ✓ Range of designs in stock or larger quantities can be manufactured to special order
- ✓ Designed for NZ homes

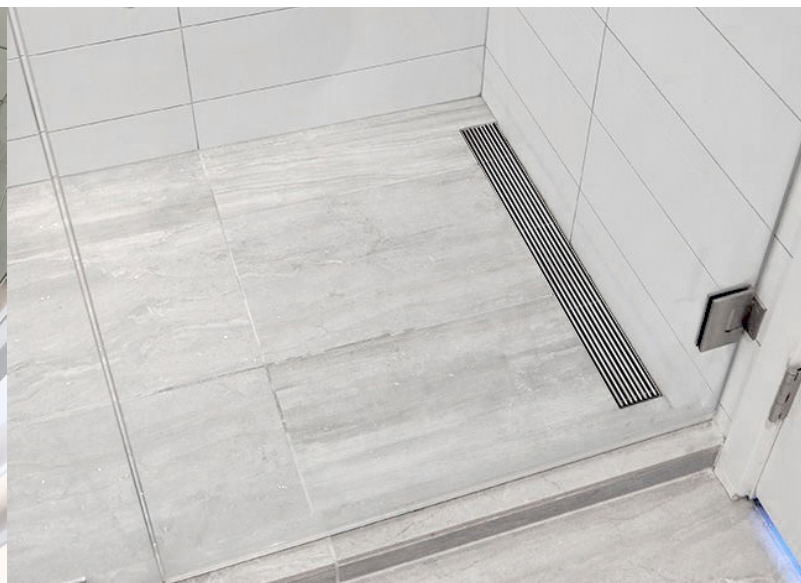


- ✓ Can be finished with tiles to match surrounding floors and walls
- ✓ Can be cut down to smaller sizes with ease
- ✓ Pre-waterproofed at factory and provides safeguard, Tiler should waterproof with complete system on site
- ✓ Excellent for heat and sound insulation
- ✓ Easy to be trimmed or reduced in size with knife and saw
- ✓ Environmentally friendly - Free of CFC and HCFC
- ✓ Lightweight yet dense and strong


SHOWER TRAY CENTRE



1000x1000mm
10-25mm Thickness




1200x1200mm
10-25mm Thickness

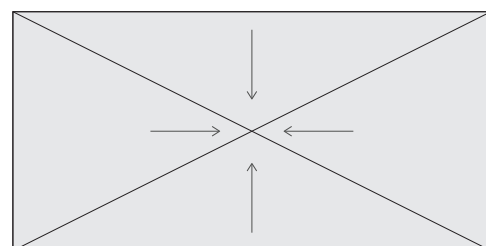


1000x2000mm
10-25mm Thickness


SHOWER TRAY LINEAR




1000x1000mm
15-32mm Thickness
800mm drain required



1200x1200mm
15-32mm Thickness
1000mm drain required


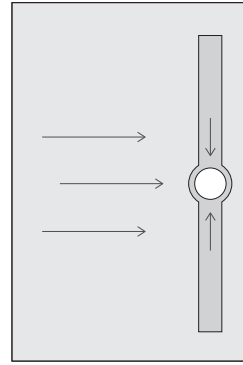


1500x1000mm
Longitudinal
15-32mm Thickness
1200mm drain required

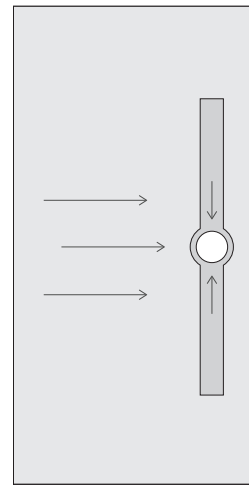


2000x1000mm
Longitudinal
15-32mm Thickness
1200mm drain required

NB:

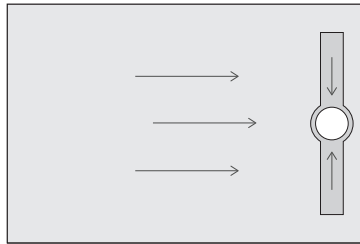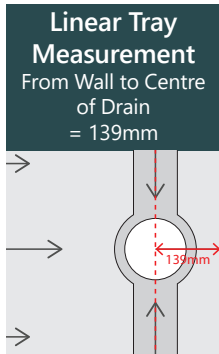


1000x1500mm
Traverse
15-35mm Thickness
800mm drain required

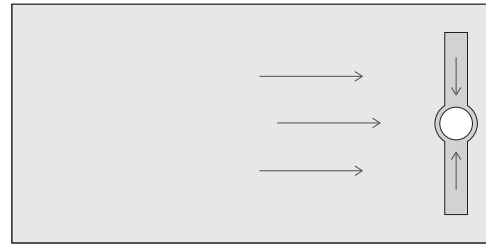


1000x2000mm
Traverse
15-40mm Thickness
800mm drain required


SHOWER TRAY SLOPED




1000x1000mm
12-30mm Thickness

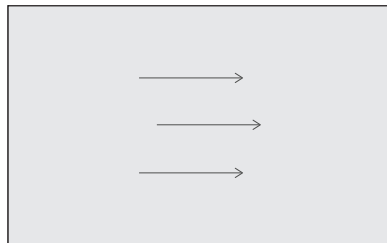


1000x1600mm
12-35mm Thickness

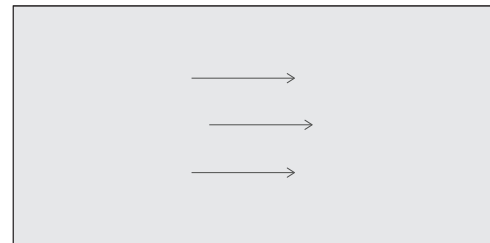


1000x2000mm
12-40mm Thickness




1200x940mm
15-30mm Thickness



1200x1200mm
12-30mm Thickness

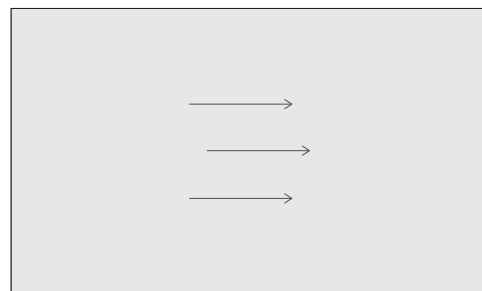

1200x2000mm
12-40mm Thickness




1000x740mm
16-30mm Thickness



1500x740mm
16-30mm Thickness

NB: When setting your shower base and hobs take into account manufactured glass door sizing.

NICHES & FOOTREST

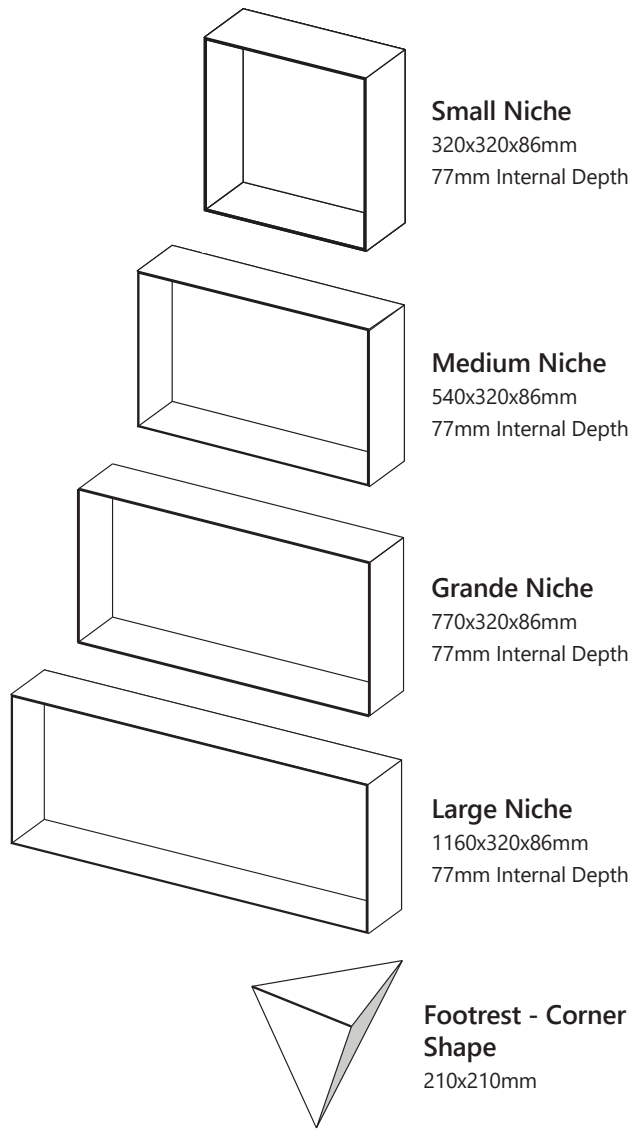

← Features a pre-shaped fall on the bottom edge of the niche which prevents water pooling.

* Niches available either flat-packed or assembled.



HOBBS



Shower Hobbs

1265x65x40mm


2065x65x40mm

1265x65x63mm


2065x65x63mm

1280x80x78mm


2080x80x78mm



The hobs feature a pre-shaped fall on the top edge to prevent water egress outside of the shower.



INSULATION BOARD

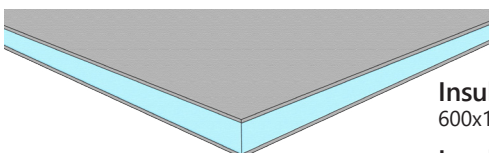

Insulation Board 6mm
600x1200mm

Insulation Board 10mm
600x1200mm


Infinity Insulation Board can be used to insulate your floors and improve the performance and comfort of your tiles. Due to the thermal properties of the specially formulated construction, using this product, in conjunction with underfloor heating, reduces heat-up times and running costs – saving you money and up to 50% of heat loss.

This product is very versatile and can also be used in wet areas, and over timber floors as a tile underlay.




TECHNICAL SPECIFICATIONS


Density	150kg/m ³	Coefficient of Linear Expansion	0.07
Thermal Conductivity	0.028W/(m.K)	Flammability	E Class
Thermal Conductivity After 5 Years	0.034~0.036W/(m.K)	Environment Friendly	Free of CFC and HCFC
Compressive Strength	450Kpa	Work temperature	-50°C, +80°C
Water Absorption	<= 1.00%		

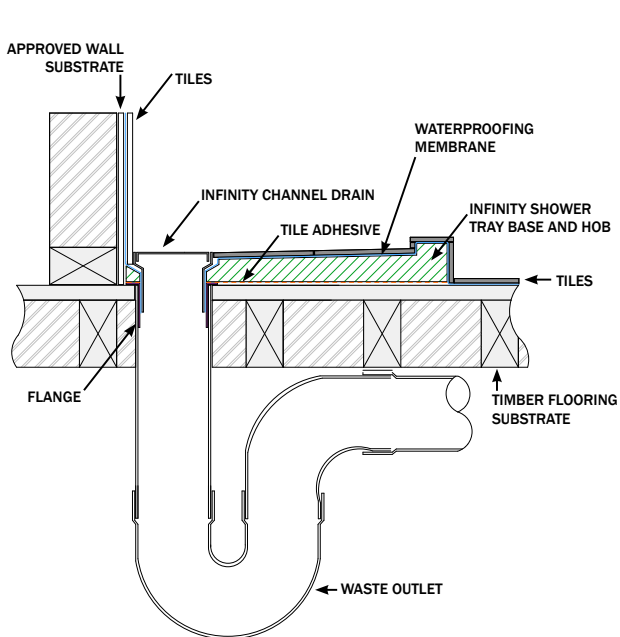


HOBBED SHOWER TRAY

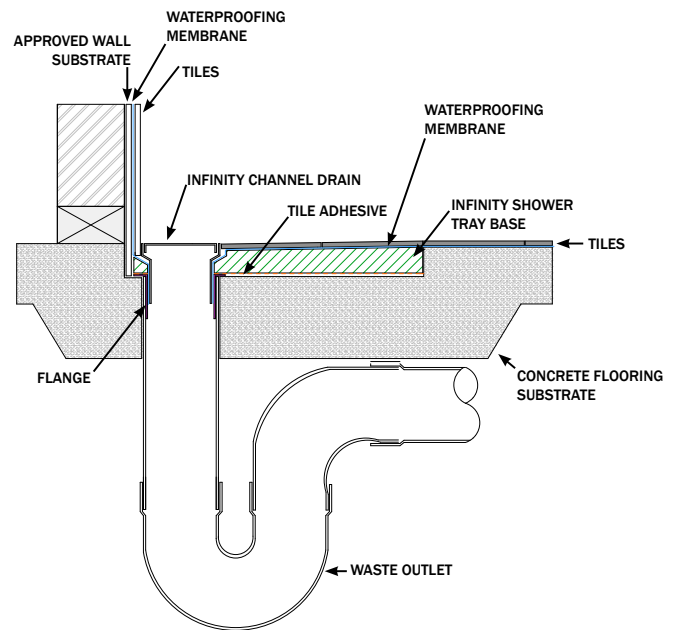

LEVEL ENTRY SHOWER TRAY

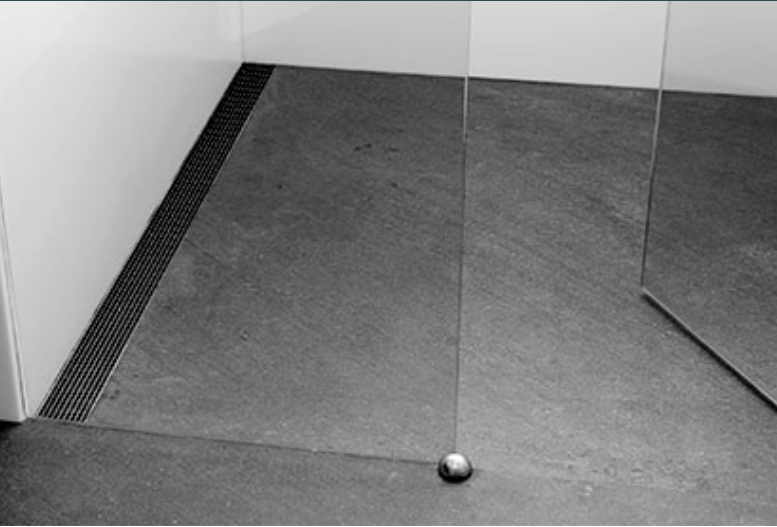

- ✓ 316 Stainless Steel – The highest quality anti-corrosion.
- ✓ Slim designer 68mm width allows an ultra sleek finish.
- ✓ Easy to install
- ✓ Manufactured to Watermark Standards to provide fast water drainage
- ✓ Double-sided option for style flexibility

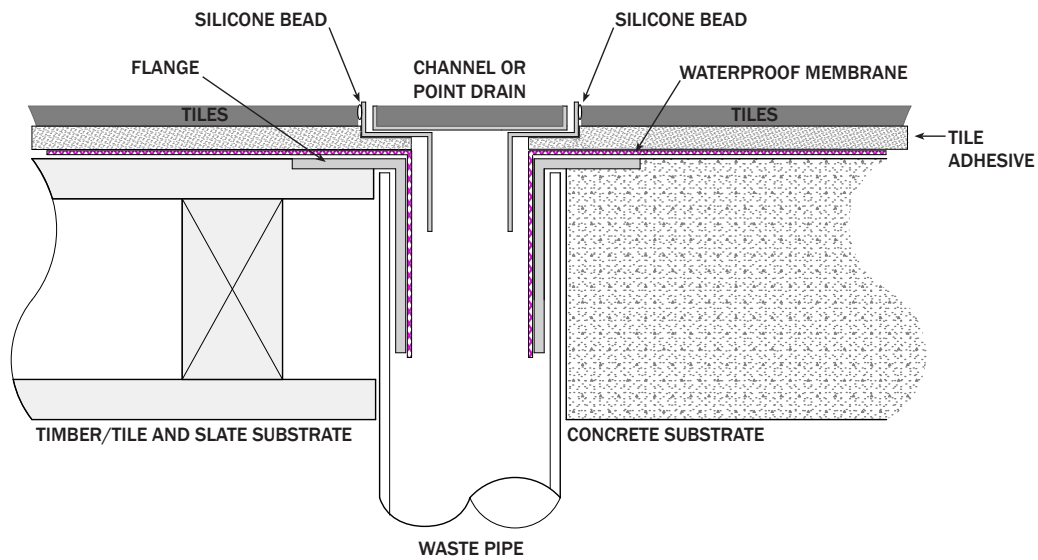

CENTRE WASTE

SIDE 1



TILE / BRUSHED PLATE
(DOUBLE SIDED)

SIDE 2



SLOT



DESIGNER FLOOR
GRATE


PRODUCT	DIMENSIONS	THICKNESS	WASTE SIZE
Tile / Brushed Plate Centre Waste	110x110mm	21mm	50mm
Slot Centre Waste	110x110mm	21mm	50mm
Designer Floor Grate (Chrome Plated Brass)	100x100mm	3mm	40mm

LINEAR DRAIN




TILE / BRUSHED PLATE
(DOUBLE SIDED)

DIMENSIONS	THICKNESS	WASTE SIZE
800x68mm	21mm	45mm
970x68mm	21mm	45mm
1000x68mm	21mm	45mm
1200x68mm	21mm	45mm
1800x68mm	21mm	45mm

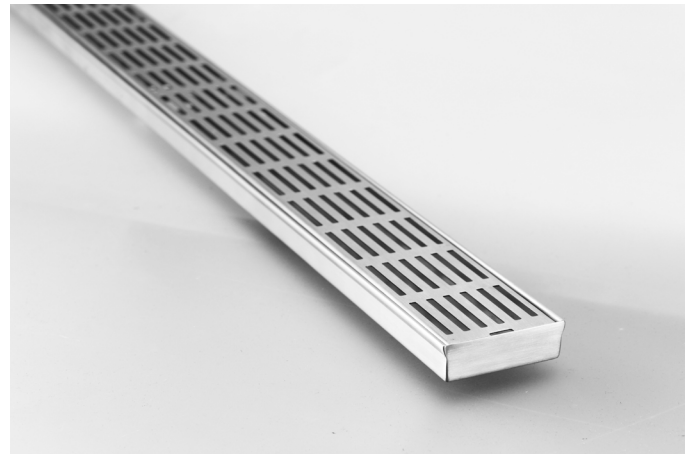

SLOT

DIMENSIONS	THICKNESS	WASTE SIZE
800x68mm	21mm	45mm
1000x68mm	21mm	45mm
1200x68mm	21mm	45mm
1800x68mm	21mm	45mm

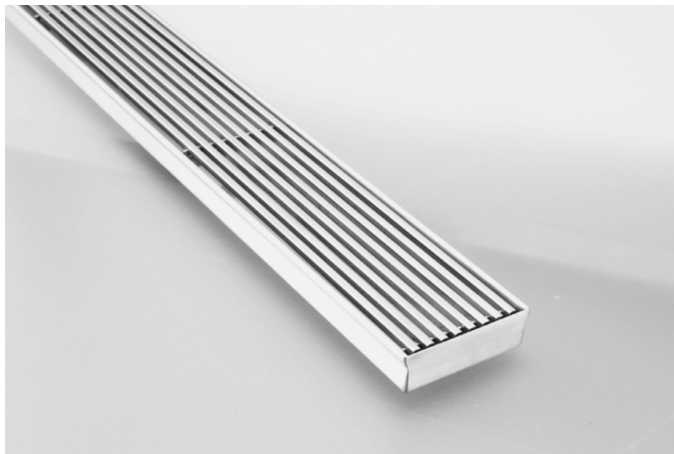

DESIGNER MESH

DIMENSIONS	THICKNESS	WASTE SIZE
800x68mm	21mm	45mm
970x68mm	21mm	45mm
1000x68mm	21mm	45mm
1200x68mm	21mm	45mm
1800x68mm	21mm	45mm



DESIGNER MESH - BLACK

DIMENSIONS	THICKNESS	WASTE SIZE
800x68mm	21mm	45mm
970x68mm	21mm	45mm

Infinity

BATHROOM LINE

Available at www.tilemax.co.nz

