




Live edge solution (option 1)

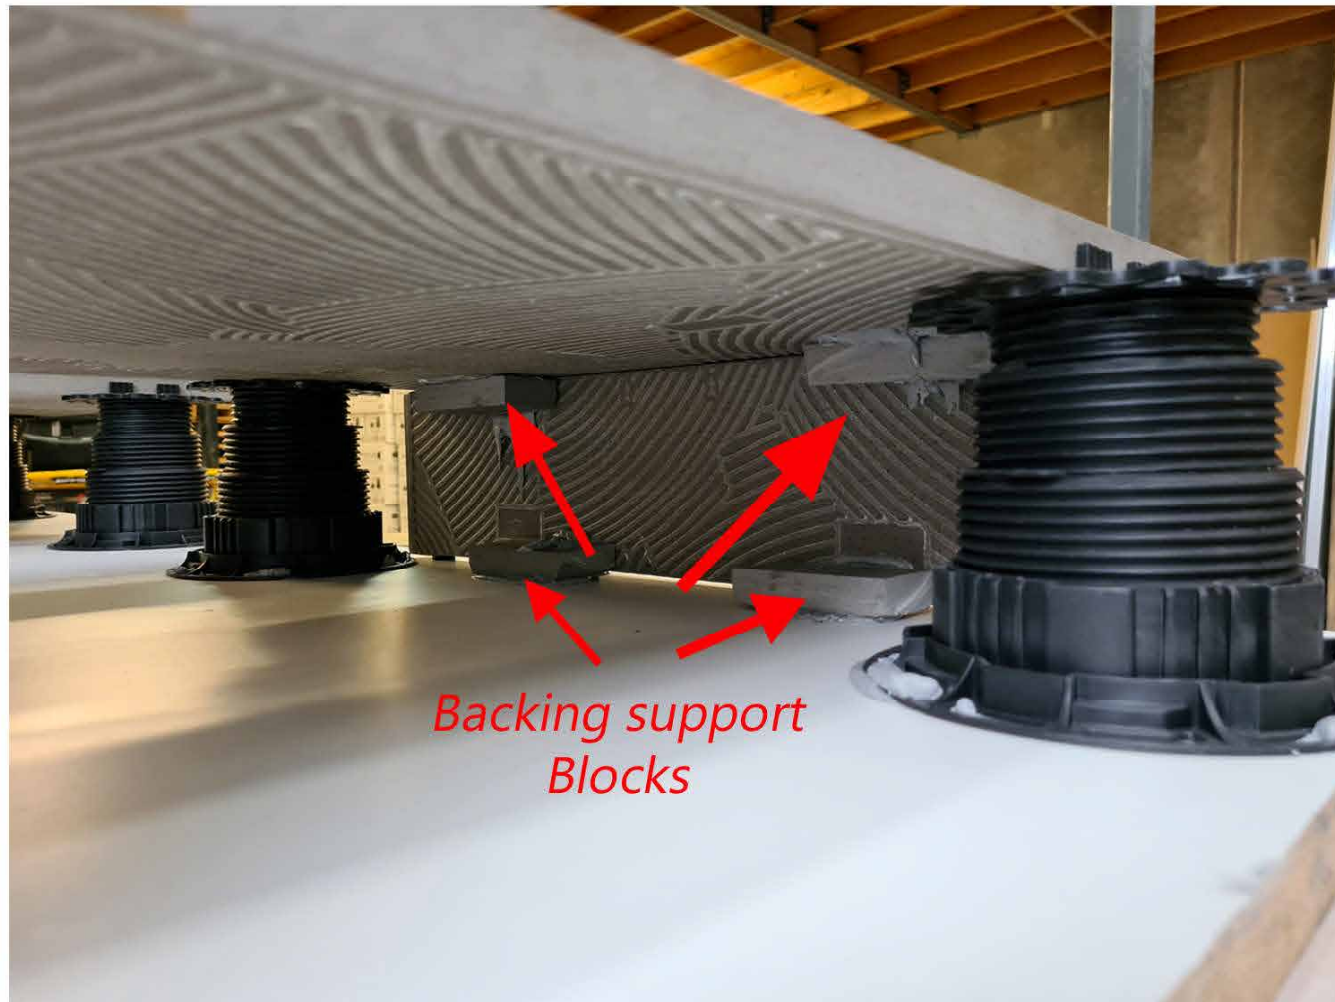

Method:

Off cut tiles '*backing support blocks*' are adhesive fixed with epoxy to the underside of the tile and to substrate.

The riser '*vertical edge tile*' is then adhered to the backing support blocks

Result:

Solid edge adhered to '*backing support blocks*' with a 5mm overhang creating the step edge.